

Maximum performance
when moving on ramps

Ergonomic workstation

Small turning radius

Optimum corrosion protection

High energy efficiency

LION
technology



EZS 7280

Electric tow tractor (28,000 kg)

The EZS 7280 sit-on tow tractor is ideal for transporting heavy loads across the airport apron or the premises of industrial companies. With its maximum pulling performance of 28 t, combined with the strong torque and good braking, it transports loads easily and safely. Its particular strength is the transport of heavy loads on ramps. Stopping and starting on the ramp is always problem free thanks to the automatic parking brake and hill start assistant.

Thanks to the compact dimensions and the large steering lock of the front wheels, even the narrowest spaces on the site can safely be mastered. The 2x10 kW individually controlled drive motors are not only key for drive capacity, they also support the manoeuvrability of the truck, especially at low speeds. The tow tractor is particularly robust for frequent outdoor use.



The cathodic-dip coating of the base frame also protects the truck against the most adverse weather conditions. Various driver cabs are available for the operator in such situations, with optional folding or sliding door, maximising protection throughout the working day.

An automotive-style pedal configuration and an adjustable steering wheel position enable every operator to move the EZS 7280 safely within a very short time.


Batteries with a maximum capacity of up to 930 Ah deliver sufficient energy for all tasks. Thanks to its rapid and boost charging capability, the need for a battery replacement can be completely avoided with a 500 Ah lithium-ion battery.

JUNGHEINRICH

EZS 7280

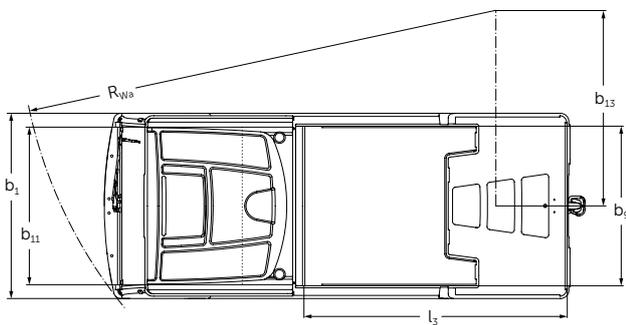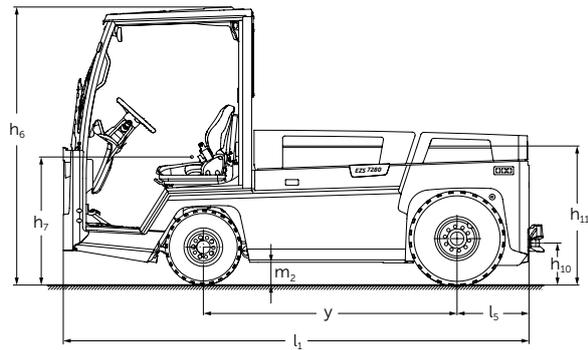

Towing capacity

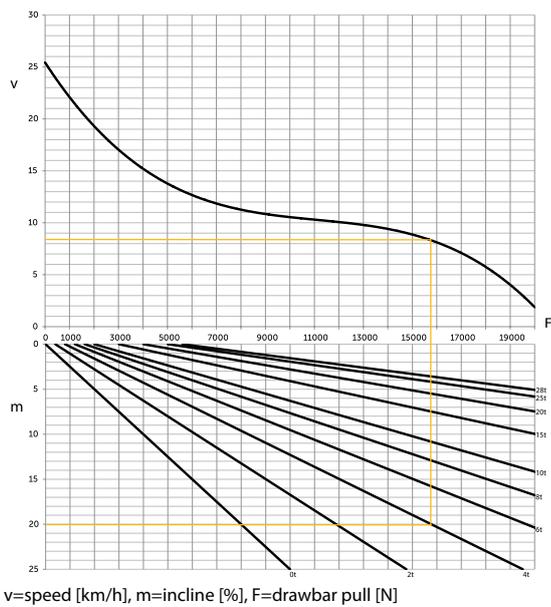

Example:

The EZS 7280 travels on a 20% incline with a 4 t load. The EZS requires a drawbar pull of 15800 N for this and reaches approx. 8 km/h.

Note:

No continuous operation possible for EZS 7280 over 5600 N.


For gradients/descents greater than 4%, it is recommended that braked trailers be used!

Technical data in line with VDI 2198

Identification	1.1	Manufacturer (abbreviation)		Jungheinrich	
	1.2	Model		EZS 7280	
	1.3	Drive		Electric	
	1.4	Manual, pedestrian, stand-on, seated, order picker operation		seat	
	1.5	Load capacity/rated load	Q t	28	
	1.7	Rated drawbar pull	F N	5,600	
Weights	1.9	Wheelbase	y mm	1,465	1,755
	2.1.1	Net weight incl. battery (see row 6.5)	kg	4,088	
	2.3	Axle loading, unladen front/rear	kg	2,100 / 1,988	2,446 / 2,350
Wheels / frame	3.1	Tyres		SE / pneumatic	
	3.2	Tyre size, front	mm	6.00 R9	
	3.3	Tyre size, rear	mm	7.00 R12	
	3.5	Wheels, number front/rear (x = driven wheels)		2/2x	
	3.6	Tread width, front	b ₁₀ mm	1,070	
	3.7	Tread width, rear	b ₁₁ mm	1,070	
	Basic dimensions	4.7	Height of overhead guard	h ₆ mm	1,970
4.8		Seat height/standing height	h ₇ mm	880	
4.12		Coupling height	h ₁₀ mm	295	
4.13		Loading height unladen	h ₁₁ mm	1,000	
4.16		loading area length	l ₃ mm	1,500	1,880
4.17		Overhang length	l ₅ mm	610	
4.18		Loading area width	b ₉ mm	1,090	
4.19		Overall length	l ₁ mm	3,000	3,300
4.21		Overall width	b ₁ /b ₂ mm	1,300	
4.32		Ground clearance, centre of wheelbase	m ₂ mm	150	
Performance data	4.35	Turning radius	W _a mm	2,825	3,275
	4.36	Smallest turning radius	b ₁₃ mm	935	1,095
	5.1	Travel speed, laden/unladen	km/h	12 / 25 ¹⁾	
	5.5	Drawbar pull, laden/unladen	N	5,600	
Electrics	5.6	Max. drawbar pull, laden/unladen	N	19,000	
	5.10	Service brake		hydraulic/electric	
	6.1	Drive motor, output S2 60 min.	kW	20.0	
	6.4	Battery voltage/nominal capacity K5	V/Ah	80	
	6.4	Battery voltage / nominal capacity	V/Ah	620	930
Misc.	6.5	Battery weight	kg	1,560	2,180
	8.1	Type of drive control		AC	

¹⁾ 13 km/h with 25 t trailer load

Benefit from the advantages

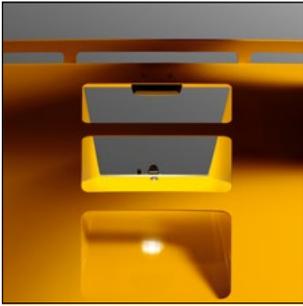

Good view of coupling from workstation



Generously designed operator workplace



Heating for a warm cab and condensation-free windows

Safety in every driving situation

Comprehensive safety equipment for high drive dynamics and performance:

- Reduction of travel speed when cornering due to curveCONTROL.
- Generously designed cab with optimum all-round view.
- Automatic parking brake with roll-back protection: When the truck comes to a halt, the tow tractor and trailer are automatically secured.
- No roll-back when starting on the ramp thanks to the hill-start assistant.
- Reliable starting on any surface thanks to anti-skid control (ASC).

Robust design for any situation

- Up to 20-mm thick steel frame.
- Cathodic-dip coating of base frame for effective corrosion protection.
- Robust front apron with high corners, an equally robust centre front as well as recessed windscreen.

Ergonomic workstation

Thanks to the automotive-style configuration of the operator workstation, the cab is especially ergonomic:

- Low entry step with level foot-well.
- Automotive-style pedal configuration.
- The speed control system relieves the strain on the operator over long distances (optional).
- Easy steering wheel adjustment for operators of different heights.
- The coupling is visible from the operator's seat and is easily accessible.
- Operator-oriented storage concept for intuitive operation.
- The heating ensures a pleasant interior temperature. Its optimised outlet vents prevent fogging of the windows.

Long operating times available with lead-acid battery

Energy-efficient 3-phase AC technology and high battery capacities allow for long operating times. The EZS offers two different wheelbases for different battery sizes with a maximum capacity of up to

930 Ah.

Additional equipment

A comprehensive range of accessories allows for individual tailoring to your requirements:

- Different coupling variants.
- LED front lights.
- SE tyres.
- floorSPOT.
- Strobe lights and beacons.
- Protective screen for front and rear lights.
- Holder for radio data components.

Lithium-ion technology

- High degree of availability thanks to extremely short charging times.
- No battery exchange required.
- Cost savings due to longer service life and low maintenance compared with lead-acid batteries.
- No charging rooms and ventilation required as there is no build up of gas.
- Longer service life with 5-year Jungheinrich guarantee.

Jungheinrich UK Ltd.

Head Office:
Sherbourne House
Sherbourne Drive
Tilbrook
Milton Keynes MK7 8HX
Telephone 01908 363100
Fax 01908 363180

info@jungheinrich.co.uk
www.jungheinrich.co.uk

The German production facilities in Norderstedt, Moosburg and Landsberg are certified. **ISO 9001**
ISO 14001

Jungheinrich fork lift trucks meet European safety requirements.



JUNGHEINRICH